

Filling machines Series PD




Design SL

with suction pipe
for liquid products



Design MV

with membrane valve
for inline cleaning application
or for abrasive products

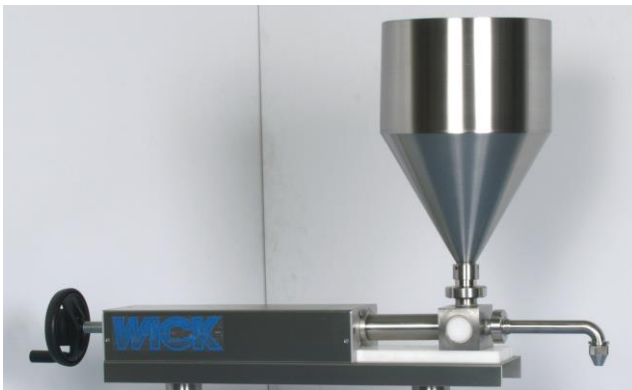

Design TR

with hopper for pasty products

Optionals:

conical cock valve
Electric heated hopper
Stirrer for the hopper

Number of filling stations:	1-4
Product contacting parts:	stainless steel 1.4571 or plastics
Sealing rings:	Perbunan, Viton or PTFE
Drive:	compr. air, 6 bar
Output:	up to 20 strokes/min


Filling ranges:

PD 2	0,2ml-2ml	PD 250	25ml-250ml
PD 10	1,0ml-10ml	PD 500	50ml-500ml
PD 25	2,5ml-25ml	PD 1000	100ml-1000ml
PD 50	5,0ml-25ml	PD 2500	250ml-2500ml
PD 100	10,0ml-100ml	PD 5000	500ml-5000ml

Example: PD SL-Version
with machine table mounted on wheels



Example: PD SL-Version with product
contacting parts fully made of plastics

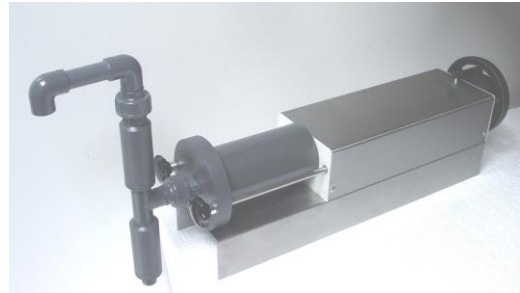

Example: PD SL-Version mounted to an automatic filling and closing machine
Minican

