

# Filling machines Series PD




## Design SL

with suction pipe  
for liquid products



## Design MV

with membrane valve  
for inline cleaning application  
or for abrasive products

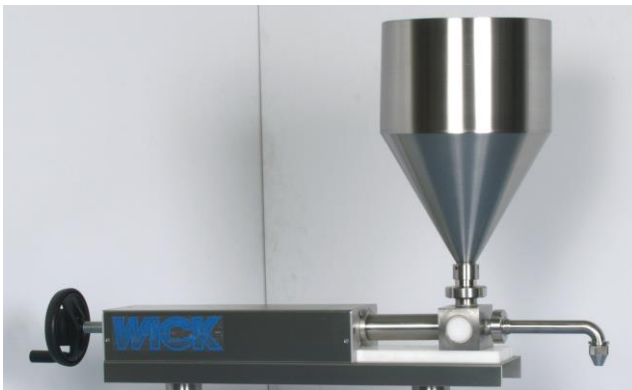

## Design TR

with hopper for pasty products

## Optionals:

conical cock valve  
Electric heated hopper  
Stirrer for the hopper

Number of filling stations:	1-4
Product contacting parts:	stainless steel 1.4571 or plastics
Sealing rings:	Perbunan, Viton or PTFE
Drive:	compr. air, 6 bar
Output:	up to 20 strokes/min


### Filling ranges:

PD 2	0,2ml-2ml	PD 250	25ml-250ml
PD 10	1,0ml-10ml	PD 500	50ml-500ml
PD 25	2,5ml-25ml	PD 1000	100ml-1000ml
PD 50	5,0ml-50ml	PD 2500	250ml-2500ml
PD 100	10,0ml-100ml	PD 5000	500ml-5000ml

Example: PD SL-Version  
with machine table mounted on wheels



Example: PD SL-Version with product  
contacting parts fully made of plastics

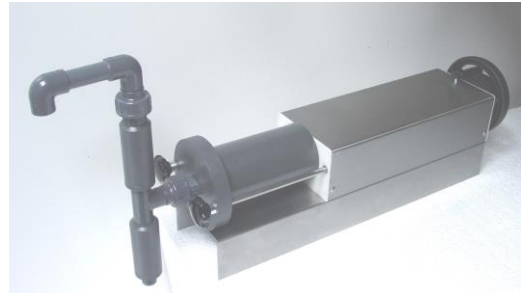

Example: PD SL-Version mounted to an automatic filling and closing machine  
Minican

